

Product Technical Sheet

Instaflow T30IR

3kW Instantaneous Handwash

Product Codes

| | |
|------------------------------|----------|
| Instantaneous Handwash – 3kW | SPT303IR |
|------------------------------|----------|

Installation

- Inlet and outlet connection: 1/2" BSP

End User

- Timed shut down ensures minimal water wastage
- Seasonal temperature adjustment provides optimum performance all year round, eliminating the need for constant adjustment
- Infrared motion sensor for turning the unit on and off so there is no need to touch the unit, ideal for commercial environments
- Direct replacement for the old T30I model
- Ideal for a cloakroom, toilet with no hot water supply, utility room or commercial environment such as a workshop or garage
- 200mm swivel arm as standard, with 100mm accessory option available, providing an option for any basin size



Instaflow T30IR

3kW Instantaneous Handwash

Handwash

| | |
|----------------------|---------------------------------|
| Power ratings | 3kW (at 240V) |
| Finish | White |
| Water Entry Points | Right: bottom |
| Cable Entry Points | Right: bottom, middle back, top |
| Water connection | 1/2" BSP |
| Terminal block | 10mm ² max cable |
| Water supply | Mains cold water |
| Water pressure min | 1bar |
| Water pressure max | 10bar (static) |
| Surface Mounted Only | |
| IP Rating | IPX4 |

Diagram Key:

 Water Entry Points


 Cable Entry Points

Dimensions:

H: 183mm

W: 228mm

D: 82mm

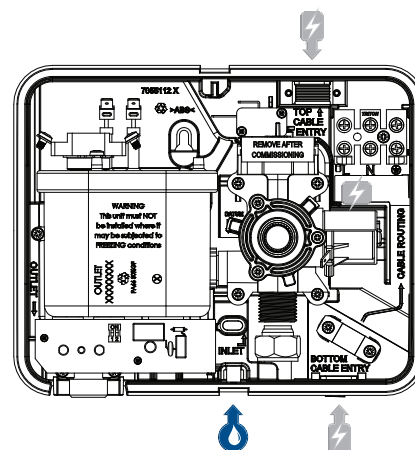

Contact our specification team

Call: 02476 324 776 | Email: specification@tritonshowers.co.uk | Web: www.tritonshowers.co.uk/specifiers